

## PUR 98 W

Wall mounted cooker hood

with EasySwitch light-touch switches for convenient operation and LED lighting



- Powerful – 650 m<sup>3</sup>/h in Booster level
- Efficient filtration- 10-ply stainless-steel grease filter
- Safe and easy to clean – Miele CleanCover
- Suitable for every home – for extraction or recirculation



EAN: 4002515752791 / Material number: 10434520 /  
Old Material Number: 28419854GB

General information	
Model identifier	PUR 98 W
Manufacturer material number	10434520
EAN number	4002515752791
Marketing class	Silver
Construction type	
Wall mounted cooker hood	•
Construction type and design	
Colour	Stainless steel
Operating modes	
Type of air guide	Can be retrofitted
Recirculation conversion kit (order separately)	DUW 20
Active charcoal filter (order separately)	DKF 12-P
Design	
Possible in RAL colour (specify colour code when ordering)	•
User convenience	
Electronic controls	•
Controls	Light-touch switches with LEDs
Power levels (number without Booster level)	3
Booster levels	1
Easy-to-clean canopy interior – CleanCover	•
Efficiency	
Energy efficiency class (A+++ – D)	A
Annual energy consumption in kWh/year	49.7
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Grease filtering efficiency class	A
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	3
Lighting	
Number x W	3 x 3 W
Light intensity in lx	450 lx
Colour temperature in K	3000 Kelvin
Fan	
Dual-action blower	•
Exhaust air	
Air throughput in Level 1 (m <sup>3</sup> /h) according to EN 61591	265
Air throughput in Level 2 (m <sup>3</sup> /h) according to EN 61591	320
Air throughput in Level 3 (m <sup>3</sup> /h) according to EN 61591	395
Air throughput in Booster level 1 (m <sup>3</sup> /h) according to EN 61591	650
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	47.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	52.0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	56.0

## PUR 98 W

Wall mounted cooker hood

with EasySwitch light-touch switches for convenient operation and LED lighting



EAN: 4002515752791 / Material number: 10434520 /  
Old Material Number: 28419854GB

Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3 67.0

Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13 32.0

Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13 37.0

Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13 41.0

Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13 52.0

### Recirculation

Air throughput in Level 1 (m³/h) according to EN 61591 190

Air throughput in Level 2 (m³/h) according to EN 61591 270

Air throughput in Level 3 (m³/h) according to EN 61591 330

Air throughput in Booster level 1 (m³/h) according to EN 61591 460

Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3 54.0

Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3 60.0

Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3 64.0

Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3 71.0

Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13 39.0

Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13 45.0

Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13 48.0

Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13 56.0

### Safety

Safety switch-off •

### Technical data

Canopy width in mm 898

Overall hood height for extraction mode and external in mm 685–1005

Overall height for recirculation mode cooker hoods in mm 815–1135

Overall height for vented and external in in. (mm) 685

Overall height for extraction mode and external mode cooker hoods in mm 1005

Canopy height in mm 62

Overall height for recirculation in in. (mm) 815

Canopy depth in mm 500

Overall height for recirculation mode cooker hoods in mm 1135

Net weight in kg 25.0

Length of supply lead in m 1.5

Standard plug fitted •

Minimum height above electric hobs in mm 450

Minimum safety distance above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm 650

PUR 98 W

Wall mounted cooker hood

with EasySwitch light-touch switches for convenient operation and LED lighting



EAN: 4002515752791 / Material number: 10434520 /  
Old Material Number: 28419854GB

Number of phases	1
Total rated load in kW	0.22
Voltage in V	230
Fuse rating in A	10
Frequency in Hz	50

#### Installation notes

Extraction ducting connection at top	•
Diameter of exhaust duct in mm	150
Telescopic chimney	•


#### Accessories included

Non-return flap	•
-----------------	---

## PUR 98 W

Wall mounted cooker hood

with EasySwitch light-touch switches for convenient operation and LED lighting

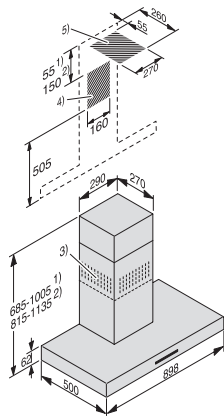

PUR92W Living, PUR98W, DA419-6, DA419-7 (Installation drawing)

1) Extraction, 2) Recirculation, 3) Ventilation grille at top for recirculation, 4+5) Installation cut-out (5 not required for recirculation)