

DAS 2620  
Slimline cooker hood  
with EasySwitch controls for convenient operation



- Classic design – stainless steel panel, 60 cm wide
- LED strip for uniform lighting
- Efficient filtration- 10-ply stainless-steel grease filter
- Safe and easy to clean – Miele CleanCover
- Recirculation mode – Active AirClean or Longlife AirClean filter



EAN: 4002516467021 / Material number: 11878170 /  
Old Material Number: 28S2620SGB

General information	
Model identifier	DAS 2620
Manufacturer material number	11878170
EAN number	4002516467021
Marketing class	Silver
Construction type	
Slimline cooker hood	•
Construction type and design	
Colour	Stainless steel
Operating modes	
Type of air guide	Can be retrofitted
Recirculation conversion kit (order separately)	DUU 151,DUU 150
Active charcoal filter (order separately)	DKFS 31-R, DKFS 31-900 P
User convenience	
Electronic controls	•
Booster levels	1
Easy-to-clean canopy interior – CleanCover	•
Efficiency	
Energy efficiency class (A+++ – D)	A
Annual energy consumption in kWh/year	41.7
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Grease filtering efficiency class	A
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	1
Lighting	
Number x W	1 x 3,2 W
Light intensity in lx	310 lx
Colour temperature in K	3500 Kelvin
Fan	
Dual-action blower	•
Exhaust air	
Air throughput in Level 1 (m <sup>3</sup> /h) according to EN 61591	195
Air throughput in Level 2 (m <sup>3</sup> /h) according to EN 61591	295
Air throughput in Level 3 (m <sup>3</sup> /h) according to EN 61591	410
Air throughput in Booster level 1 (m <sup>3</sup> /h) according to EN 61591	555
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	47.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	55.0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	61.0
Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	68.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	34.0

DAS 2620  
Slimline cooker hood  
with EasySwitch controls for convenient operation



EAN: 4002516467021 / Material number: 11878170 /  
Old Material Number: 28S2620SGB

Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13 41.0

Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13 47.0

Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13 54.0

#### Recirculation

Air throughput in Level 1 (m<sup>3</sup>/h) according to EN 61591 190

Air throughput in Level 2 (m<sup>3</sup>/h) according to EN 61591 290

Air throughput in Level 3 (m<sup>3</sup>/h) according to EN 61591 415

Air throughput in Booster level 1 (m<sup>3</sup>/h) according to EN 61591 550

Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3 53.0

Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3 60.0

Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3 68.0

Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3 74.0

Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13 39.0

Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13 46.0

Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13 54.0

Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13 61.0

#### Safety

Safety switch-off •

#### Technical data

Canopy width in mm 596

Canopy height in mm 36

Canopy depth in mm 273

Net weight in kg 12.0

Length of supply lead in m 1.5

Standard plug fitted •

Minimum height above electric hobs in mm 450

Minimum safety distance above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm 650

Number of phases 1

Total rated load in kW 0.20

Voltage in V 230

Fuse rating in A 10

Frequency in Hz 50

#### Installation notes


Extraction ducting connection at top •

Diameter of exhaust duct in mm 150

#### Accessories included

Non-return flap •

DAS 2620  
Slimline cooker hood  
with EasySwitch controls for convenient operation

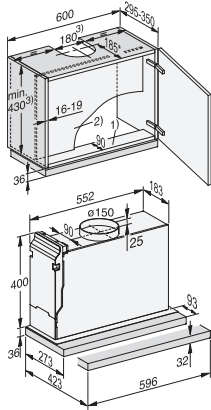

DAS2620, DAS2622 Living, DAS2620 EXTA, DAS4620,  
Installation drawings

1) The front section of the wall unit must be fitted with a base panel to secure the cooker hood. If the appliance is fitted further back, e.g. to accommodate a front panel, then the shelf depth should be deeper accordingly. , 2) If a partition wall is to be provided in the unit, it must be removable. , 3) Extraction, recirculation with conversion kit DUU 150. , \* In this installation situation, the deflector plate is flush with the front edge of the housing unit carcass. , If you wish to position the cooker hood further forward or further back (e.g. because it has a front panel), dimensions have to be adapted accordingly. , Extraction: the height of the wall unit and the cut-out dimensions must take into account any accessories fitted, e.g. silencer, recirculation hood conversion kit).