


DAS 4940
Slimline cooker hood
for installation in narrow wall units with EasySwitch controls




- Perfect combination with Con@ctivity-enabled hobs
- Light design – transparent glass panel, 90 cm wide
- LED strip for uniform lighting
- Efficient filtration- 10-ply stainless-steel grease filter
- Recirculation mode – Active AirClean or Longlife AirClean filter

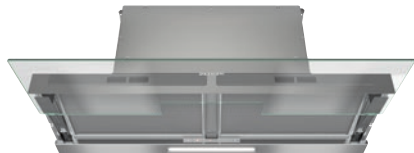

EAN: 4002516496366 / Material number: 11878240 /
Old Material Number: 28S4940TGB

General information	
Model identifier	DAS 4940
Manufacturer material number	11878240
EAN number	4002516496366
Marketing class	Gold
Construction type	
Slimline cooker hood	•
Construction type and design	
Colour	Transp. glass
Operating modes	
Type of air guide	Can be retrofitted
Recirculation conversion kit (order separately)	DUU 151
Active charcoal filter (order separately)	DKF 31-P, DKF 31-R
User convenience	
Miele@home	•
Electronic controls	•
Con@ctivity	Yes
Touch-on-glass controls	•
Run-on time 5/15 min.	•
Booster levels	1
Grease filter saturation indicator	•
Active charcoal filter saturation indicator	•
Easy-to-clean canopy interior – CleanCover	•
Efficiency	
Energy efficiency class (A+++ – D)	A++
ECO motor (DC motor)	•
PowerManagement system	•
Annual energy consumption in kWh/year	24.8
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Grease filtering efficiency class	B
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	2
Lighting	
Number x W	1 x 3 W
Light intensity in lx	285 lx
Colour temperature in K	3500 Kelvin
Dimmer function	•
Fan	
Dual-action blower	•
Exhaust air	
Air throughput in Level 1 (m ³ /h) according to EN 61591	200
Air throughput in Level 2 (m ³ /h) according to EN 61591	290
Air throughput in Level 3 (m ³ /h) according to EN 61591	400
Air throughput in Booster level 1 (m ³ /h) according to EN 61591	625


DAS 4940
Slimline cooker hood
for installation in narrow wall units with EasySwitch controls

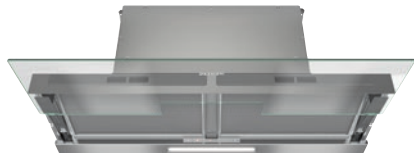

EAN: 4002516496366 / Material number: 11878240 /
Old Material Number: 28S4940TGB

Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	36.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	44.0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	51.0
Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	62.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	22.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	30.0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	38.0
Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13	48.0
Recirculation	
Air throughput in Level 1 (m ³ /h) according to EN 61591	175
Air throughput in Level 2 (m ³ /h) according to EN 61591	270
Air throughput in Level 3 (m ³ /h) according to EN 61591	425
Air throughput in Booster level 1 (m ³ /h) according to EN 61591	610
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	41.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	50.0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	61.0
Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	70.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	28.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	36.0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	47.0
Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13	56.0
Safety	
Safety switch-off	•
Single-ply safety glass (ESG)	•
Technical data	
Canopy width in mm	861
Canopy height in mm	68
Canopy depth in mm	307
Net weight in kg	15.0
Length of supply lead in m	1.5
Standard plug fitted	•
Minimum height above electric hobs in mm	450
Number of phases	1
Total rated load in kW	0.08
Voltage in V	230

DAS 4940
Slimline cooker hood
for installation in narrow wall units with EasySwitch controls

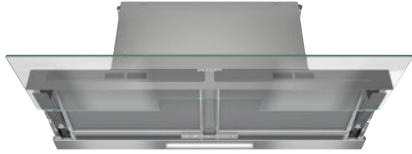



EAN: 4002516496366 / Material number: 11878240 /
Old Material Number: 28S4940TGB

Fuse rating in A	10
Frequency in Hz	50
Installation notes	
Extraction ducting connection at top	•
Extraction connection at top and rear	•
Diameter of exhaust duct in mm	150
Fitting template	•
Accessories included	
Non-return flap	•

DAS 4940

Slimline cooker hood

for installation in narrow wall units with EasySwitch controls



DAS4940, Installation drawings

- 1) Extraction, recirculation with conversion kit DUU 150.,
- 2) Alternative ducting connection to the rear.,
- 3) Accessory DSM module.,
- 4) The wall unit can be fitted with a partition after installation. The slots for the grease filters and, in recirculation mode, for the odor filters must remain accessible., The height of the wall unit and the cut-out dimensions must take into account any accessories fitted (e.g. silencer, recirculation hood conversion kit, DSM module)