

DA 6698 W Purist. Ed.6000

Wall mounted cooker hood

with energy-efficient LED lighting and touch controls for simple operation.



- Family design – based on Miele built-in appliances
- Unique user convenience – Con@ctivity
- Powerful – 640 m<sup>3</sup>/h in Booster level
- Energy-efficient and quiet – powerful ECO motor
- Pleasantly quiet – Miele Silence package



EAN: 4002516585275 / Material number: 12050610 /  
Old Material Number: 28669851GB

General information	
Model identifier	DA 6698 W Purist. Ed.6000
Manufacturer material number	12050610
EAN number	4002516585275
Marketing class	Diamond
Construction type	
Wall mounted cooker hood	•
Construction type and design	
Colour	Stainless steel
Operating modes	
Type of air guide	Can be retrofitted
User convenience	
Electronic controls	•
Con@ctivity	Yes
Booster levels	1
Silence package	•
Efficiency	
Energy efficiency class (A+++ – D)	A++
ECO motor (DC motor)	•
PowerManagement system	•
Annual energy consumption in kWh/year	24.6
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Grease filtering efficiency class	A
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	3
Lighting	
Number x W	3 x 3 W
Light intensity in lx	670 lx
Colour temperature in K	3500 Kelvin
Fan	
Dual-action blower	•
Exhaust air	
Air throughput in Level 1 (m <sup>3</sup> /h) according to EN 61591	200
Air throughput in Level 2 (m <sup>3</sup> /h) according to EN 61591	300
Air throughput in Level 3 (m <sup>3</sup> /h) according to EN 61591	400
Air throughput in Booster level 1 (m <sup>3</sup> /h) according to EN 61591	640
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	36.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	44.0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	52.0
Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	63.0

DA 6698 W Purist. Ed.6000

Wall mounted cooker hood

with energy-efficient LED lighting and touch controls for simple operation.



EAN: 4002516585275 / Material number: 12050610 /  
Old Material Number: 28669851GB

Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	21.0
--	------

Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	29.0
--	------

Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	37.0
--	------

Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13	48.0
---	------

#### Recirculation

Air throughput in Level 1 (m <sup>3</sup> /h) according to EN 61591	110
---	-----

Air throughput in Level 2 (m <sup>3</sup> /h) according to EN 61591	185
---	-----

Air throughput in Level 3 (m <sup>3</sup> /h) according to EN 61591	315
---	-----

Air throughput in Booster level 1 (m <sup>3</sup> /h) according to EN 61591	460
---	-----

Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	45.0
--	------

Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	53.0
--	------

Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	63.0
--	------

Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	72.0
---	------

Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	30.0
--	------

Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	38.0
--	------

Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	48.0
--	------

Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13	57.0
---	------

#### Safety

Safety switch-off	•
-------------------	---

Single-ply safety glass (ESG)	•
-------------------------------	---

#### Technical data

Canopy width in mm	898
--------------------	-----

Overall hood height for extraction mode and external in mm	710–1030
--	----------

Overall height for recirculation mode cooker hoods in mm	840–1160
--	----------

Overall height for vented and external in in. (mm)	710
--	-----

Overall height for extraction mode and external mode cooker hoods in mm	1030
---	------

Canopy height in mm	85
---------------------	----

Overall height for recirculation in in. (mm)	840
--	-----

Canopy depth in mm	500
--------------------	-----

Overall height for recirculation mode cooker hoods in mm	1160
--	------

Net weight in kg	26.0
------------------	------

Length of supply lead in m	1.5
----------------------------	-----

Standard plug fitted	•
----------------------	---

Minimum height above electric hobs in mm	450
--	-----

Minimum safety distance above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	650
--	-----

Number of phases	1
------------------	---

DA 6698 W Purist. Ed.6000

Wall mounted cooker hood

with energy-efficient LED lighting and touch controls for simple operation.



EAN: 4002516585275 / Material number: 12050610 /  
Old Material Number: 28669851GB

Total rated load in kW	0.08
Voltage in V	230
Fuse rating in A	10
Frequency in Hz	50

#### Installation notes

Extraction ducting connection at top	•
Diameter of exhaust duct in mm	150
Telescopic chimney	•


#### Accessories included

Non-return flap	•
-----------------	---

DA 6698 W Purist. Ed.6000

Wall mounted cooker hood

with energy-efficient LED lighting and touch controls for simple operation.

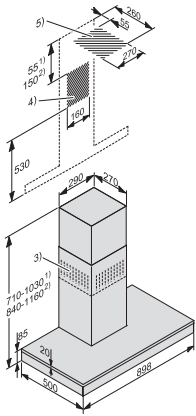

DA 6698 W, CLST (Installation drawing)

1. Extraction, 2. Recirculation, 3 Ventilation grilles at the top for recirculation, 4. + 5. Vent cut-out positions (Area 5 not required for recirculation)