

KU 7016 D

Built-under refrigerator, 82–88 cm niche height with LED lighting, freezer compartment, split door shelves in a compact design. Requires kitchen fronts with a minimum height of 72 cm.



- Optimum and maintenance-free LED
- Integrated 4 freezer compartment
- Flexible inner door – split door shelves
- Dishwasher-proof door shelves – ComfortClean
- Cool food down quickly thanks to SuperCool



EAN: 4002516779100 / Material number: 12519090 /
Old Material Number: 36701610EU1

General information	
Model identifier	KU 7016 D
Manufacturer material number	12519090
EAN number	4002516779100
Marketing class	Silver
Appliance category	
Refrigerator	•
Construction type	
Built-in appliance	•
Integrated appliance	•
Undercounter appliance	•
Door hinge	right
Convertible door hinging	•
User convenience	
Fridge zone lighting	LED
Networking with Miele@home	•
ComfortClean	•
ComfortFrost	•
Control system	
Operating concept	EasyControl
SuperCool	•
No. of temperature zones	2
Sabbath mode	•
Fridge/Fridge section	
4* freezer compartment	•
No. of shelves	2
Number of inner door racks for tinned food	2
Door rack for bottles	1
Door shelves	3
Efficiency and sustainability	
Energy efficiency class (A–G)	D
Annual energy consumption in kWh	115.20
Energy consumption in 24 h in kWh	0.31
Safety	
Acoustic door alarm	•
Optical door alarm	•
Technical data	
Niche width in mm min.	600
Niche width in mm max.	600
Niche height in mm min.	820
Niche height in mm max.	880
Niche depth in mm	560
Appliance width in mm	597
Appliance height in mm	818
Appliance depth in mm	550
Weight in kg	36.5
Door hinge technology	Fixed door
Max. door front weight – refrigerator, in kg	10

KU 7016 D

Built-under refrigerator, 82–88 cm niche height

with LED lighting, freezer compartment, split door shelves in a compact design. Requires kitchen fronts with a minimum height of 72 cm.



EAN: 4002516779100 / Material number: 12519090 /


Old Material Number: 36701610EU1

Climate range	SN-T
Refrigerator compartment in l	92
4* freezer compartment in l	14
Total usable capacity in l	106
Storage time in case of fault in h	9
Freezer capacity in kg/24 h	2.00
Acoustic airborne noise emission class (A–D)	B
Sound emissions in dB(A) re 1 pW	34
Current consumption (mA)	2000
Voltage in V	220-240
Fuse rating in A	10
Number of phases	1
Frequency in Hz	50-60
Length of supply lead in m	2.2
Replacing lamps	Service
Accessories included	
Egg tray	•
Water filter	Nein

KU 7016 D

Built-under refrigerator, 82–88 cm niche height

with LED lighting, freezer compartment, split door shelves in a compact design. Requires kitchen fronts with a minimum height of 72 cm.

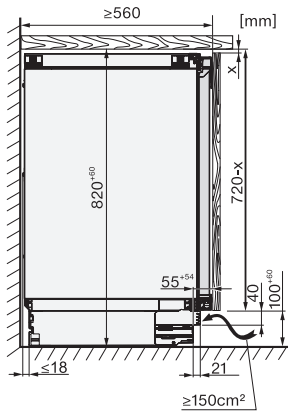

KU7016D, KU7015D, KU7035D, FNUS7040D, Built-under, side view