


## KWTUS 7096 E

Built-under wine conditioning unit, 82–88 cm niche height with separate temperature zones, FlexiFrame and Push2open in a compact design.



- Perfect drinking and storage temperatures thanks to separate temperature zones
- Storage of all bottle sizes/shapes thanks to FlexiFrame
- Perfect regulation of humidity with ActiveHumidity
- Writing on the wooden shelves on the NoteBoard
- UV-resistant insulated glass perfectly protects your wine

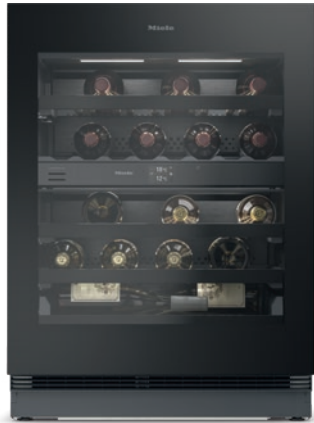

EAN: 4002516779438 / Material number: 12519560 /  
Old Material Number: 39709610EU1

|   |                           |
|---|---------------------------|
| <b>General information</b>              |                           |
| Model identifier                        | KWTUS 7096 E              |
| Manufacturer material number            | 12519560                  |
| EAN number                              | 4002516779438             |
| Marketing class                         | Diamond                   |
| <b>Appliance category</b>               |                           |
| Wine conditioning unit                  | •                         |
| <b>Construction type</b>                |                           |
| Built-in appliance                      | •                         |
| Integrated appliance                    | •                         |
| Undercounter appliance                  | •                         |
| Door hinge                              | right                     |
| Convertible door hinging                | •                         |
| Side-by-side enabled                    | •                         |
| <b>Design</b>                           |                           |
| Casing colour                           | black                     |
| Front colour                            | Obsidian Black glass      |
| Wine compartment lighting               | continuously dimmable LED |
| <b>User convenience</b>                 |                           |
| Networking with Miele@home              | •                         |
| Door opening aid                        | Push2open                 |
| DynaCool                                | •                         |
| ActiveHumidity                          | •                         |
| SoftClose                               | •                         |
| Active AirClean filter                  | •                         |
| Total number of shelves                 | 5                         |
| Number of shelves                       | 4                         |
| Shelf material                          | Beechwood                 |
| Number of FlexiFrame racks              | 3                         |
| Number of shelves for crosswise storage | 1                         |
| SelfClose FlexiFrame                    | •                         |
| NoteBoard                               | Yes                       |
| Low-vibration storage                   | •                         |
| <b>Control system</b>                   |                           |
| Operating concept                       | FreshTouch                |
| No. of temperature zones                | 2                         |
| Min. temperature setting range in °C    | 5                         |
| Max. temperature setting range in °C    | 20                        |
| Sabbath mode                            | •                         |
| <b>Fridge/Fridge section</b>            |                           |
| Dry back wall                           | BlackSteel                |
| <b>Efficiency and sustainability</b>    |                           |
| Energy efficiency class (A–G)           | E                         |
| Annual energy consumption in kWh        | 83.20                     |
| Energy consumption in 24 h in kWh       | 0.22                      |
| <b>Safety</b>                           |                           |
| Lock function                           | •                         |

## KWTUS 7096 E

Built-under wine conditioning unit, 82–88 cm niche height with separate temperature zones, FlexiFrame and Push2open in a compact design.




EAN: 4002516779438 / Material number: 12519560 /  
Old Material Number: 39709610EU1

|                            |   |
|----------------------------|---|
| Acoustic door alarm        | • |
| Acoustic temperature alarm | • |
| Optical door alarm         | • |
| Optical temperature alarm  | • |


| Technical data                                   |            |
|--|------------|
| Niche width in mm min.                           | 600        |
| Niche width in mm max.                           | 604        |
| Niche height in mm min.                          | 820        |
| Niche height in mm max.                          | 880        |
| Niche depth in mm                                | 560        |
| Appliance width in mm                            | 597        |
| Appliance height in mm                           | 819        |
| Appliance depth in mm                            | 579        |
| Weight in kg                                     | 52.2       |
| Climate range                                    | SN-ST      |
| Refrigerator compartment in l                    | 95         |
| Total usable capacity in l                       | 95         |
| 0.75 l Bordeaux bottle capacity (no. of bottles) | 32 bottles |
| Acoustic airborne noise emission class (A–D)     | B          |
| Sound emissions in dB(A) re 1 pW                 | 32         |
| Current consumption (mA)                         | 1500       |
| Voltage in V                                     | 220-240    |
| Fuse rating in A                                 | 10         |
| Number of phases                                 | 1          |
| Frequency in Hz                                  | 50-60      |
| Length of supply lead in m                       | 2.2        |
| Accessories included                             |            |
| White chalk pen                                  | •          |

## KWTUS 7096 E


Built-under wine conditioning unit, 82–88 cm niche height with separate temperature zones, FlexiFrame and Push2open in a compact design.

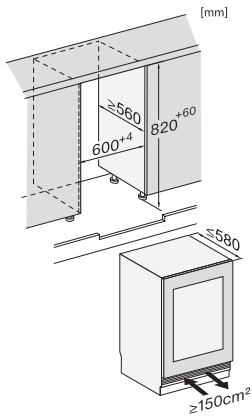


KWTUS7054F, KWTUS7055F, KWTUS7074F, KWTUS7096E, Built-under, niche dimensions

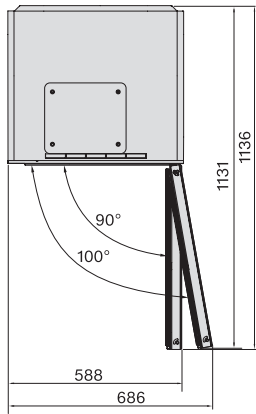


KWTUS7196E, KWTUS7096E, Built-under, top view

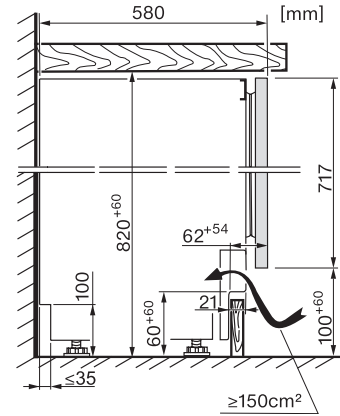


KWTUS7096E, Built-under, side view

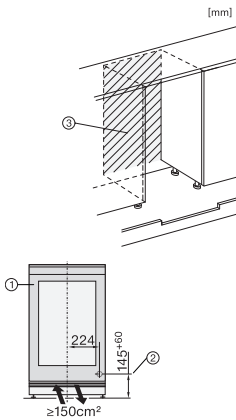

KWTUS7054F, KWTUS7055F, KWTUS7074F, KWTUS7096E, KWTUS7196E, Built-under, side view (\*footnote)

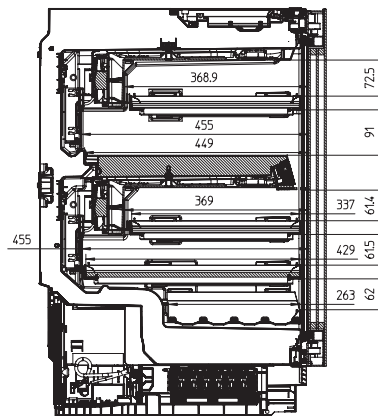

KWTUS7096E, interior dimensions

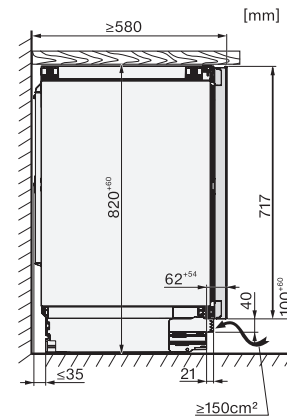

KWTUS7096E, Built-under, side view

1. View from the front, 2. Mains connection cable, L = 2200 mm, 3. No connection in this area