

DAS 4630
Slimline cooker hood
with intuitive SmartControl controls



- Elegant design – obsidian black control panel, 60 cm wide
- Unique user convenience – Con@ctivity
- LED strip for uniform lighting
- Efficient filtration- 10-ply stainless-steel grease filter
- Recirculation mode – Active AirClean or Longlife AirClean filter



EAN: 4002516496151 / Material number: 11878210 /
Old Material Number: 28S4630BGB

General information	
Model identifier	DAS 4630
Manufacturer material number	11878210
EAN number	4002516496151
Marketing class	Gold
Construction type	
Slimline cooker hood	•
Construction type and design	
Colour	Obsidian black
Operating modes	
Type of air guide	Can be retrofitted
Recirculation conversion kit (order separately)	DUU 151,DUU 150
Active charcoal filter (order separately)	DKFS 31-P, DKFS 31-R
User convenience	
Miele@home	•
Electronic controls	•
Con@ctivity	Yes
Touch-on-glass controls	•
Power levels (number without Booster level)	3
Run-on time 5/15 min.	•
Booster levels	2
Grease filter saturation indicator	•
Active charcoal filter saturation indicator	•
Easy-to-clean canopy interior – CleanCover	•
Efficiency	
Energy efficiency class (A+++ – D)	A+++
ECO motor (DC motor)	•
PowerManagement system	•
Annual energy consumption in kWh/year	23.5
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Grease filtering efficiency class	A
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	1
Lighting	
Number x W	1 x 3 W
Light intensity in lx	330 lx
Colour temperature in K	3500 Kelvin
Dimmer function	•
Fan	
Dual-action blower	•
Exhaust air	
Air throughput in Level 1 (m ³ /h) according to EN 61591	180
Air throughput in Level 2 (m ³ /h) according to EN 61591	280
Air throughput in Level 3 (m ³ /h) according to EN 61591	400
Air throughput in Booster level 1 (m ³ /h) according to EN 61591	600

DAS 4630
Slimline cooker hood
with intuitive SmartControl controls



EAN: 4002516496151 / Material number: 11878210 /
Old Material Number: 28S4630BGB

Air throughput in Booster level 2 (m ³ /h) according to EN 61591	720
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	38.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	48.0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	56.0
Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	66.0
Sound power in Booster level 2 (dB(A) re 1 pW) acc. to EN 60704-3	70.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	25.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	34.0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	42.0
Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13	53.0
Sound pressure in Booster level 2 (dB(A) re 20 µPa) acc. to EN 60704-2-13	57.0
Recirculation	
Air throughput in Level 1 (m ³ /h) according to EN 61591	165
Air throughput in Level 2 (m ³ /h) according to EN 61591	265
Air throughput in Level 3 (m ³ /h) according to EN 61591	380
Air throughput in Booster level 1 (m ³ /h) according to EN 61591	585
Air throughput in Booster level 2 (m ³ /h) according to EN 61591	695
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	43.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	53.0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	62.0
Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	72.0
Sound power in Booster level 2 (dB(A) re 1 pW) acc. to EN 60704-3	77.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	29.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	40.0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	48.0
Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13	59.0
Sound pressure in Booster level 2 (dB(A) re 20 µPa) acc. to EN 60704-2-13	63.0
Safety	
Safety switch-off	•
Single-ply safety glass (ESG)	•


DAS 4630
Slimline cooker hood
with intuitive SmartControl controls



EAN: 4002516496151 / Material number: 11878210 /
Old Material Number: 28S4630BGB

Technical data	
Canopy width in mm	596
Canopy height in mm	36
Canopy depth in mm	273
Net weight in kg	12.0
Length of supply lead in m	1.5
Standard plug fitted	•
Minimum height above electric hobs in mm	450
Minimum safety distance above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	650
Number of phases	1
Total rated load in kW	0.16
Voltage in V	230
Fuse rating in A	10
Frequency in Hz	50
Installation notes	
Extraction ducting connection at top	•
Diameter of exhaust duct in mm	150
Accessories included	
Non-return flap	•

DAS 4630
Slimline cooker hood
with intuitive SmartControl controls

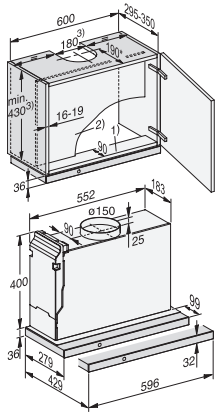

DAS4630, DAS4631, Installation drawings

1) The front section of the wall unit must be fitted with a base panel to secure the cooker hood. If the appliance is fitted further back, e.g. to accommodate a front panel, then the shelf depth should be deeper accordingly. 2) If a partition wall is to be provided in the unit, it must be removable. 3) Extraction, recirculation with conversion kit DUU 150. * In this installation situation, the deflector plate is flush with the front edge of the housing unit carcass. , If you wish to position the cooker hood further forward or further back, dimensions have to be adapted accordingly. , Extraction: the height of the wall unit and the cut-out dimensions must take into account any accessories fitted, e.g. silencer, recirculation hood conversion kit).